



Miniature flow control valve M5 - Ø3 tube

Ordering code	6.01.305.F
FUNCTION	
F 1.2 = Unidirectional	
2.1 = Unidirectional	
1.1 = Bidirectional	




Weight gr. 14



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 1,5

Miniature flow control valve M5 - Ø3 tube, with adjustment knob

Ordering code	6.01.305.FP
FUNCTION	
F 1.2 = Unidirectional	
2.1 = Unidirectional	
1.1 = Bidirectional	




Weight gr. 16




Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 1,5

Miniature flow control valve M5 - Ø3,17 tube

Ordering code	6.01.315.F
FUNCTION	
F 1.2 = Unidirectional	
2.1 = Unidirectional	
1.1 = Bidirectional	

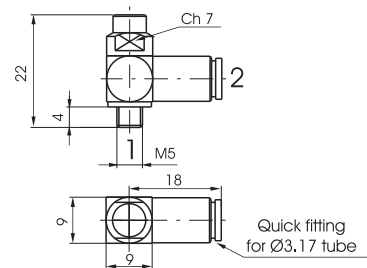


Weight gr. 14




Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 1,5

Miniature flow control valve M5 - Ø3,17 tube, with adjustment knob

Ordering code	6.01.315.FP
FUNCTION	
F 1.2 = Unidirectional	
2.1 = Unidirectional	
1.1 = Bidirectional	

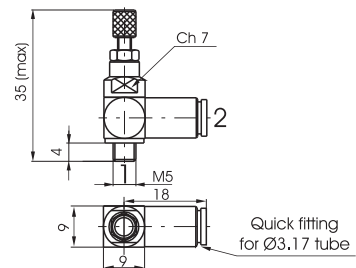


Weight gr. 16




Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 1,5

Miniature flow control valve M5 - Ø4 tube

Ordering code	
6.01.45.F	
FUNCTION	
1.2 = Unidirectional	
2.1 = Unidirectional	
1.1 = Bidirectional	




Weight gr. 14



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 1,5

Miniature flow control valve M5 - Ø4 tube, with adjustment knob

Ordering code	
6.01.45.FP	
FUNCTION	
1.2 = Unidirectional	
2.1 = Unidirectional	
1.1 = Bidirectional	




Weight gr. 16



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 1,5

Flow control valve M5 - in line ports

Ordering code	
6.01.F	
FUNCTION	
05 = Unidirectional	
05/2 = Bidirectional	




Weight gr. 48



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 2

Flow control valve M5 - port at 90°

Ordering code	
6.01.05.F	
FUNCTION	
90 = Unidirectional	
90/2 = Bidirectional	






Weight gr. 48



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 2



Flow control valve M5 - with a through bolt

Ordering code 6.01.05.F					
FUNCTION F 180 = Unidirectional 180/2 = Bidirectional					
Weight gr. 52					
Operational characteristic		Fluid	Max working pressure	Operating Temperature	Orifice size
		Filtered air	10 bar	Min. -5°C Max. +70°C	mm. 2






Flow control valve G1/8" - ultrasensitive

Ordering code 6.01.18/F					
FUNCTION F 4 = Unidirectional 5 = Bidirectional					
Weight gr. 100					
Operational characteristic		Fluid	Max working pressure	Operating Temperature	Orifice size
		Filtered air	10 bar	Min. -5°C Max. +70°C	mm. 3

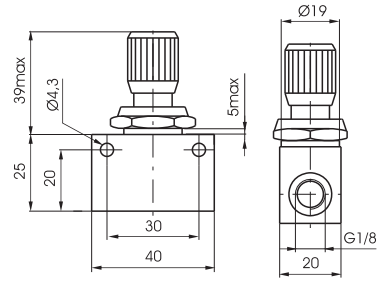


Flow control valve G1/8" - ultrasensitive with lock nut

Ordering code 6.01.18/F					
FUNCTION F 6 = Unidirectional 7 = Bidirectional					
Weight gr. 105					
Operational characteristic		Fluid	Max working pressure	Operating Temperature	Orifice size
		Filtered air	10 bar	Min. -5°C Max. +70°C	mm. 3

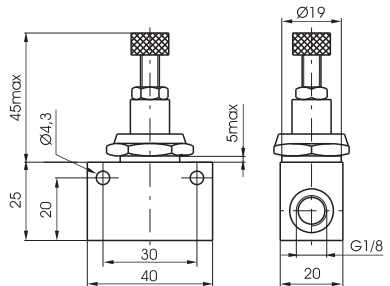

Flow control valve G1/8"


Ordering code 6.01.F					
FUNCTION F 18N = Unidirectional 18NE = Unidir. economic vers. 18/1N = Bidirectional 18/1NE = Bidir. economic vers.					
Weight gr. 50					
Operational characteristic		Fluid	Max working pressure	Operating Temperature	Orifice size
		Filtered air	10 bar	Min. -5°C Max. +70°C	mm. 4



1

Flow control valve G1/4" - compact type - unidirectional

Ordering code
6.01.14/1




Weight gr. 100





Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 5,5

Flow control valve G1/4"

Ordering code
6.01.F
FUNCTION
F 14N = Unidirectional
14/1N = Bidirectional

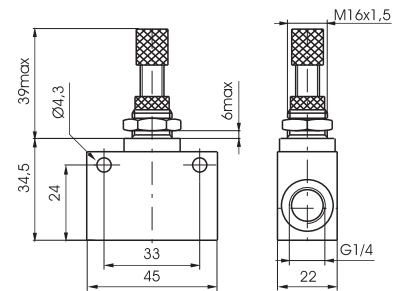


Weight gr. 105





Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 7

Flow control valve G1/2"

Ordering code
6.01.F
FUNCTION
F 12N = Unidirectional
12/1N = Bidirectional

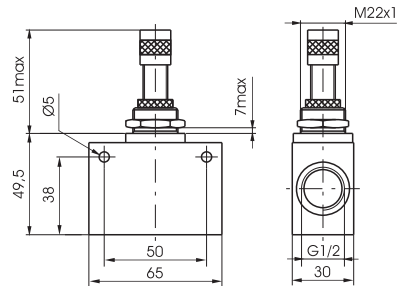


Weight gr. 505




Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 12

Flow control valve G3/4" - unidirectional

Ordering code
6.01.34




Weight gr. 500



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Orifice size
	Filtered air	10 bar	Min. -5°C	Max. +70°C	mm. 12

Quick exhaust valve - M5 - G1/8" - G1/4" - G1/2"


Ordering code
6.02.1
CONNECTION
05 = M5
18 = G 1/8"
14 = G 1/4"
12 = G 1/2"

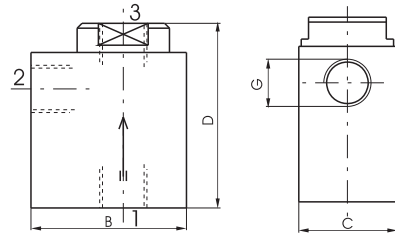

G	M5	1/8"	1/4"	1/2"
B	22	32	35	52
C	12	20	25	37
D	28	38	50	62
Weight gr.	50	62	112	310

Flow rate NI/min at 6 bar with $\Delta p = 1$	from 1 to 2	120	480	960	3300
Flow rate NI/min at 6 bar on free exhaust	from 2 to 3	220	1100	1930	6500


Weight *see table*



Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	10 bar	Min. -5°C	Max. +70°C

Quick exhaust valve in line - M5 - M7 - G1/8"


Ordering code
6.02.1.C.L
CONNECTION (IN)
M5 = M5
03 = tube Ø3
04 = tube Ø4
06 = tube Ø6
CONNECTION (OUT)
M5 = M5
M7 = M7
18 = G1/8"
04 = tube Ø4
06 = tube Ø6

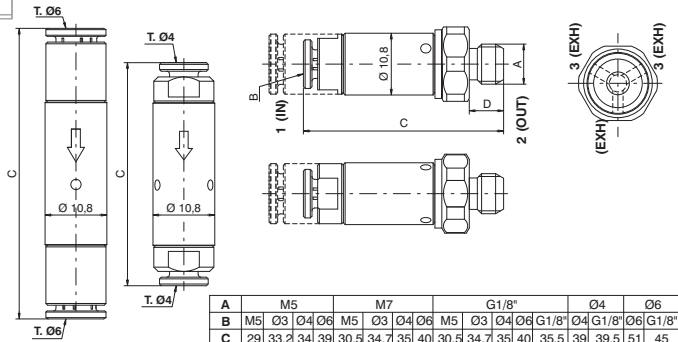

A	M5			M7			G1/8"						Ø4		Ø6		
B	M5	Ø3	Ø4	Ø6	M5	Ø3	Ø4	Ø6	M5	Ø3	Ø4	Ø6	G1/8"	Ø4	G1/8"	Ø6	G1/8"
C	29	33,2	34	39	30,5	34,7	35	40	30,5	34,7	35	40	35,5	39	39,5	51	45
D	4,5			17			6						17	20	18		

Weight (gr.)	90			110						90		110	
Flow rate NI/min at 6 bar with $\Delta p = 1$ (from 1 to 2)	90			110						90		110	
Flow rate NI/min at 6 bar on free exhaust (from 2 to 3)	240			350						240		350	


Weight *see table*



Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	10 bar	Min. -5°C	Max. +70°C


Exhaust flow control - M5 - G1/8" - G1/4" - G1/2"

Ordering code
6.03.1
CONNECTION
05 = M5
18 = G 1/8"
14 = G 1/4"
12 = G 1/2"

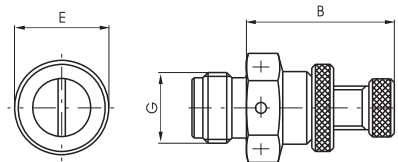

G	M5	1/8"	1/4"	1/2"
B	21	18	22	39
E	9	13	16	25
Weight gr.	10	18	32	155


Weight *see table*



Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	10 bar	Min. -5°C	Max. +70°C


Shuttle valve "OR" - M5 - G1/8" - G1/4"

Ordering code
6.04.1
CONNECTION
05 = M5
18 = G 1/8"
14 = G 1/4"

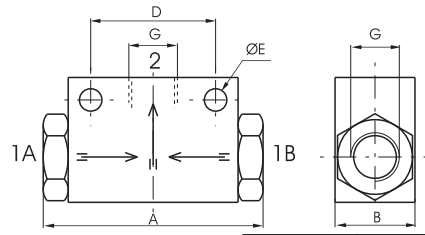

	M5	1/8"	1/4"
A	27	44	62
B	12	16	22
D	15	25	35
E	3,5	4,5	5,5
Weight gr.	33	50	110
Flow rate at 6 bar with $\Delta p = 1$	NI/min.	110	700
		2200	


Weight "see table"




Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	10 bar	Min. -5°C	Max. +70°C

Shuttle valve "OR" - T=4

Ordering code
6.04.04

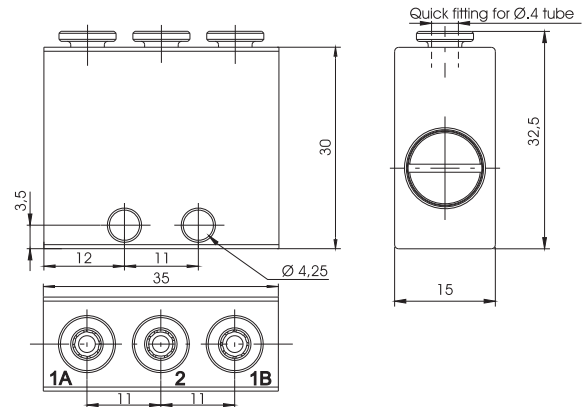


Weight gr. 50



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Flow rate 6 bar at $\Delta p = 1$	Orifice size	Connections
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +70°C	105 NI/min	mm. 2,5	Fitting T=4


Shuttle valve "AND" - M5 - G1/8"

Ordering code
6.04.1/1
CONNECTION
05 = M5
18 = G 1/8"

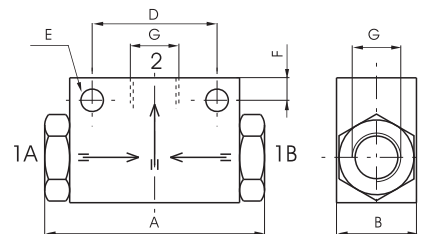

	M5	1/8"
A	36	44
B	12	16
D	20	25
E	3,2	4,5
F	3,5	4,5
Weight gr.	30	50
Flow rate at 6 bar with $\Delta p = 1$	NI/min.	100
		480


Weight "see table"




Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	10 bar	Min. -5°C	Max. +70°C

Shuttle valve "AND" - T=4

Ordering code
6.04.04/1

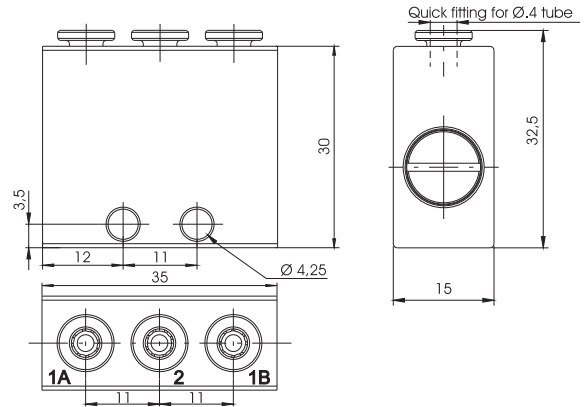


Weight gr. 50



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Flow rate 6 bar at $\Delta p=1$	Orifice size	Connections
	Filtered air	10 bar	Min. -5°C	Max. +70°C	105 NI/min	mm. 2,5	Fitting T=4


Silencers steel wool - G1/8" - G1/4" - G3/8" - G1/2"

Ordering code
6.05.1
CONNECTION
18 = G 1/8"
14 = G 1/4"
38 = G 3/8"
12 = G 1/2"



G	1/8"	1/4"	3/8"	1/2"
A	12	13	15	17
E	14	17	22	27
Weight gr.	8	16	32	44


Weight "see table"



Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	10 bar	Min. -5°C	Max. +70°C

Silencers brass M5 - G1/8" - G1/4" - G3/8" - G1/2" - G3/4" - G1"

Ordering code
6.06.1
CONNECTION
05 = M5
18 = G 1/8"
14 = G 1/4"
38 = G 3/8"
12 = G 1/2"
34 = G 3/4"
01 = G 1"



G	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"
A	17	15	18	28	32	40	50
D	8	12	15	19	23	29	38
Weight gr.	4	8	15	35	50	92	182


Weight "see table"




Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	10 bar	Min. -5°C	Max. +70°C

G 1/8" compact check valves

Ordering code
6.07.18.Ⓔ
SEALS
Ⓔ R = NBR
VR = FPM

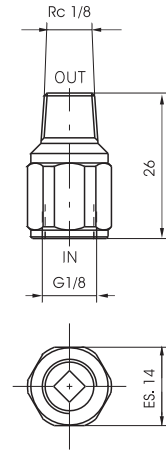


Weight gr. 50



Operational characteristic	Fluid	Max working pressure	Operating Temperature		Flow rate 6 bar at Δp=1
	Filtered air	Min. 2.5 bar Max.	Min. -5°C	Max. +70°C	100 NI/min

Check valves M5 - G/18" - G1/4" - G3/8" - G1/2"

Ordering code
6.07.Ⓙ
POPPET
05 = NBR - M5
18 = NBR - G 1/8"
14 = NBR - G 1/4"
38 = NBR - G 3/8"
12 = NBR - G 1/2"
18V = FPM - G 1/8"
14V = FPM - G 1/4"
38V = FPM - G 3/8"
12V = FPM - G 1/2"

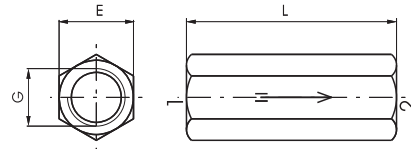

G	M5	1/8"	1/4"	3/8"	1/2"
E	10	14	17	21	25
L	21	37	48	50	60
Weight gr.	14	35	60	85	136

Flow rate at 6 bar with Δp = 1 NI/min. 160 650 1150 2600 3500


Weight "see table"



Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +70°C (+150°C)

Manifold 4 ports M5 - G1/8" - G1/4" - G3/8" - G1/2"

Ordering code
6.08.Ⓒ/4
CONNECTION
Ⓒ 05 = M5
18 = G 1/8"
14 = G 1/4"
38 = G 3/8"
12 = G 1/2"

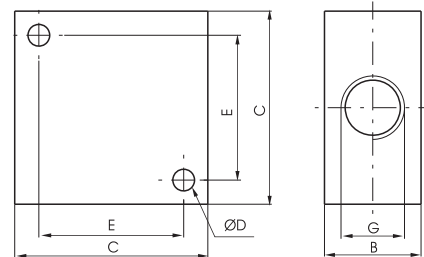


G	M5	1/8"	1/4"	3/8"	1/2"
B	10	16	20	20	30
C	20	32	40	40	50
D	3,3	4,5	4,5	5,5	6,5
E	14	22	30	30	38
Weight gr.	28	38	68	54	135

Weight "see table"

Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	20 bar	Min. -5°C	Max. +70°C

Manifold 10 ports M5 - G1/8" - G1/4" - G3/8" - G1/2"

Ordering code
6.08.0/8
CONNECTION
05 = M5
18 = G 1/8"
14 = G 1/4"
38 = G 3/8"
12 = G 1/2"

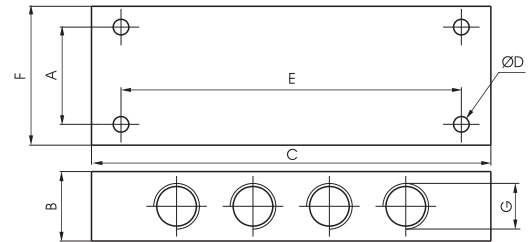


G	M5	1/8"	1/4"	3/8"	1/2"
A	16	20	28	28	36
B	12	18	20	20	30
C	60	90	115	130	170
D	3,3	4,5	4,5	5,5	5,5
E	50	75	98	112	150
F	22	32	40	40	50
Weight gr.	92	110	185	165	460

Weight "see table"


Operational characteristic	Fluid	Max working pressure	Operating Temperature	
	Filtered air	20 bar	Min. -5°C	Max. +70°C

Block valve G1/4"

Ordering code
6.09.14.F
FUNCTION
UN = Unidirectional
BN = Bidirectional

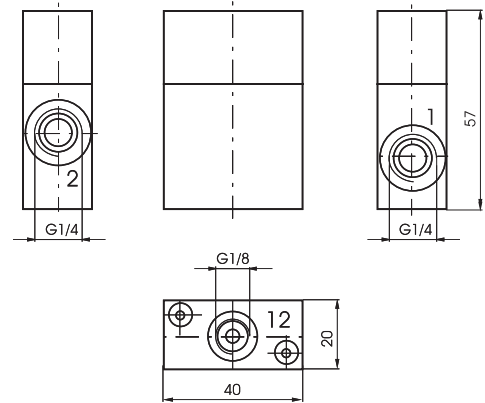


Weight gr. 122




Operational characteristic	Fluid	Max working pressure	Min. piloting pressure	Operating Temperature		Flow rate at 6 bar with Δp=1	Orifice size
	Filtered and lubricated air	10 bar	4 bar	Min. -5°C	Max. +70°C	700 NI/min	mm. 7

Block valve G1/2"

Ordering code
6.09.12.F
FUNCTION
UN = Unidirectional
BN = Bidirectional

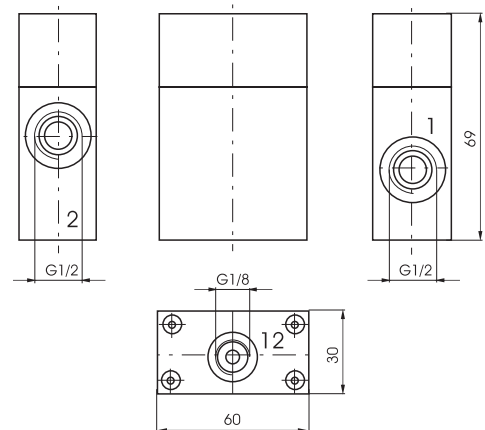

Weight gr. 305



Operational characteristic	Fluid	Max working pressure	Min. piloting pressure	Operating Temperature		Flow rate at 6 bar with Δp=1	Orifice size
	Filtered and lubricated air	10 bar	4 bar	Min. -5°C	Max. +70°C	2000 NI/min	mm. 12



Economizer G1/8" - G1/4"

Ordering code


6.11.Ⓢ

CONNECTION

- 18 = G 1/8"
- 14 = G 1/4"

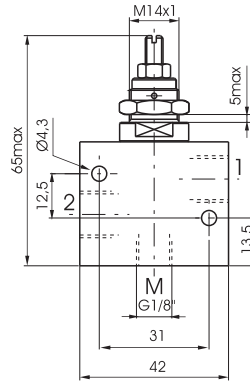

FLOW RATE CURVES
FROM 1 TO 2



Weight gr. 85



Operational characteristic	Fluid	Max working pressure	Pressure range	Operating Temperature		Flow rate from port 2 to 1 at 6 bar with Δp=1	Orifice size
	Filtered and lubricated air	10 bar	0 - 5,5 bar	Min. -5°C	Max. +70°C	860 NI/min	mm. 6



Gang mounting manifold for valves and solenoid valves G 1/8"

Ordering code

6.10.18.18/N

* N. OF POSITIONS

- 2 = N. 2 positions
- 3 = N. 3 positions
- 4 = N. 4 positions
- 5 = N. 5 positions
- 6 = N. 6 positions
- 7 = N. 7 positions
- 8 = N. 8 positions
- 9 = N. 9 positions
- 10 = N. 10 positions

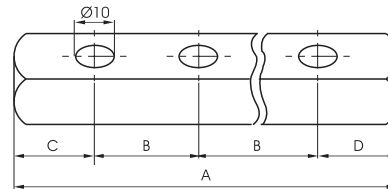

	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	58	76	94	112	130	148	166	184	202	
B	18	18	18	18	18	18	18	18	18	
C	20	20	20	20	20	20	20	20	20	
D	20	20	20	20	20	20	20	20	20	
Weight gr.	55	80	105	130	155	180	205	230	255	

Weight "see table"



Gang mounting manifold for valves and solenoid valves G 1/8"

Ordering code

6.10.18.25/N

* N. OF POSITIONS

- 2 = N. 2 positions
- 3 = N. 3 positions
- 4 = N. 4 positions
- 5 = N. 5 positions
- 6 = N. 6 positions
- 7 = N. 7 positions
- 8 = N. 8 positions
- 9 = N. 9 positions
- 10 = N. 10 positions

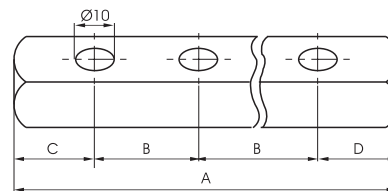


	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	70	95	120	145	170	195	220	245	270	
B	25	25	25	25	25	25	25	25	25	
C	20	20	20	20	20	20	20	20	20	
D	25	25	25	25	25	25	25	25	25	
Weight gr.	80	115	150	185	220	255	290	325	360	

Weight "see table"

Gang mounting manifold for valves and solenoid valves G 1/8"

Ordering code
6.10.18.26/N
* N. OF POSITIONS
2 = N. 2 positions
3 = N. 3 positions
4 = N. 4 positions
5 = N. 5 positions
N 6 = N. 6 positions
7 = N. 7 positions
8 = N. 8 positions
9 = N. 9 positions
10 = N. 10 positions

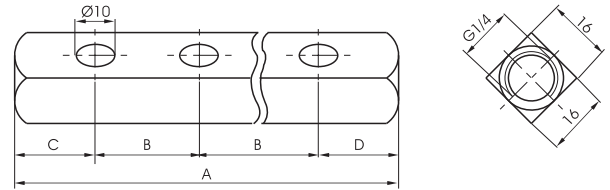


	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	66	92	118	144	170	196	222	248	274	
B	26	26	26	26	26	26	26	26	26	
C	20	20	20	20	20	20	20	20	20	
D	20	20	20	20	20	20	20	20	20	
Weight gr.	70	110	145	185	220	260	300	340	375	

Weight "see table"

Gang mounting manifold for valves and solenoid valves G 1/8"

Ordering code
6.10.18.30/N
* N. OF POSITIONS
2 = N. 2 positions
3 = N. 3 positions
4 = N. 4 positions
N 5 = N. 5 positions
6 = N. 6 positions
7 = N. 7 positions
8 = N. 8 positions
9 = N. 9 positions
10 = N. 10 positions

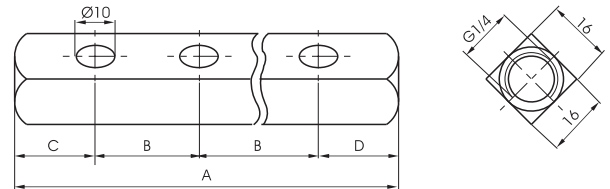


	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	80	110	140	170	200	230	260	290	320	
B	30	30	30	30	30	30	30	30	30	
C	25	25	25	25	25	25	25	25	25	
D	25	25	25	25	25	25	25	25	25	
Weight gr.	100	140	180	220	260	300	340	380	420	

Weight "see table"

Gang mounting manifold for valves and solenoid valves G 1/8"

Ordering code
6.10.18.32/N
* N. OF POSITIONS
2 = N. 2 positions
3 = N. 3 positions
4 = N. 4 positions
5 = N. 5 positions
N 6 = N. 6 positions
7 = N. 7 positions
8 = N. 8 positions
9 = N. 9 positions
10 = N. 10 positions

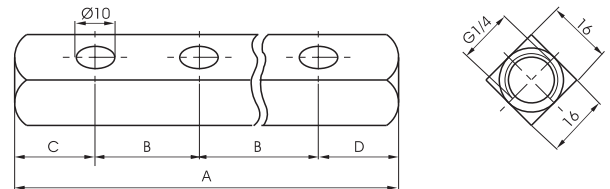

	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	82	114	146	178	210	242	274	306	338	
B	32	32	32	32	32	32	32	32	32	
C	25	25	25	25	25	25	25	25	25	
D	25	25	25	25	25	25	25	25	25	
Weight gr.	100	145	190	235	280	325	370	415	460	

Weight "see table"



Gang mounting manifold for valves and solenoid valves G 1/8"

Ordering code

6.10.18.35/N

* N. OF POSITIONS

- 2 = N. 2 positions
- 3 = N. 3 positions
- 4 = N. 4 positions
- 5 = N. 5 positions
- 6 = N. 6 positions
- 7 = N. 7 positions
- 8 = N. 8 positions
- 9 = N. 9 positions
- 10 = N. 10 positions

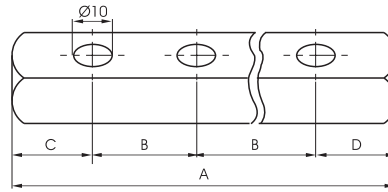

* N. OF POSITIONS

	2	3	4	5	6	7	8	9	10
A	89	124	159	194	229	264	299	334	369
B	35	35	35	35	35	35	35	35	35
C	27	27	27	27	27	27	27	27	27
D	27	27	27	27	27	27	27	27	27
Weight gr.	110	160	210	260	310	360	410	460	510

Weight "see table"



Gang mounting manifold for valves and solenoid valves G 1/4"

Ordering code

6.10.14.20/N

* N. OF POSITIONS

- 2 = N. 2 positions
- 3 = N. 3 positions
- 4 = N. 4 positions
- 5 = N. 5 positions
- 6 = N. 6 positions
- 7 = N. 7 positions
- 8 = N. 8 positions
- 9 = N. 9 positions
- 10 = N. 10 positions

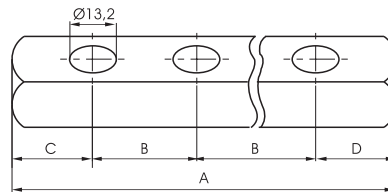

* N. OF POSITIONS

	2	3	4	5	6	7	8	9	10
A	65	85	105	125	145	165	185	205	225
B	20	20	20	20	20	20	20	20	20
C	22,5	22,5	22,5	22,5	22,5	22,5	22,5	22,5	22,5
D	22,5	22,5	22,5	22,5	22,5	22,5	22,5	22,5	22,5
Weight gr.	130	150	190	190	210	230	250	270	290

Weight "see table"



Gang mounting manifold for valves and solenoid valves G 1/4"

Ordering code

6.10.14.25/N

* N. OF POSITIONS

- 2 = N. 2 positions
- 3 = N. 3 positions
- 4 = N. 4 positions
- 5 = N. 5 positions
- 6 = N. 6 positions
- 7 = N. 7 positions
- 8 = N. 8 positions
- 9 = N. 9 positions
- 10 = N. 10 positions

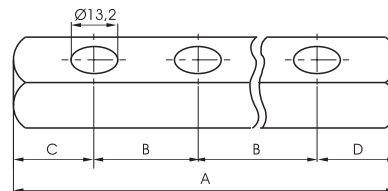


* N. OF POSITIONS

	2	3	4	5	6	7	8	9	10
A	75	100	125	150	175	200	225	250	275
B	25	25	25	25	25	25	25	25	25
C	25	25	25	25	25	25	25	25	25
D	25	25	25	25	25	25	25	25	25
Weight gr.	140	170	200	230	260	290	320	350	380

Weight "see table"

Gang mounting manifold for valves and solenoid valves G 1/4"

Ordering code
6.10.14.30/N
* N. OF POSITIONS
2 = N. 2 positions
3 = N. 3 positions
4 = N. 4 positions
5 = N. 5 positions
N 6 = N. 6 positions
7 = N. 7 positions
8 = N. 8 positions
9 = N. 9 positions
10 = N. 10 positions

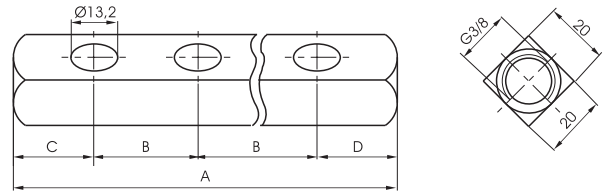


	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	80	110	140	170	200	230	260	290	320	
B	30	30	30	30	30	30	30	30	30	
C	25	25	25	25	25	25	25	25	25	
D	25	25	25	25	25	25	25	25	25	
Weight gr.	150	190	230	270	310	350	390	430	470	

Weight "see table"

Gang mounting manifold for valves and solenoid valves G 1/4"

Ordering code
6.10.14.35/N
* N. OF POSITIONS
2 = N. 2 positions
3 = N. 3 positions
4 = N. 4 positions
N 5 = N. 5 positions
6 = N. 6 positions
7 = N. 7 positions
8 = N. 8 positions
9 = N. 9 positions
10 = N. 10 positions

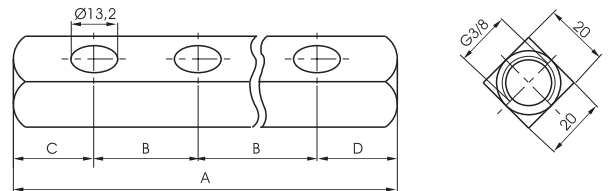


	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	85	120	155	190	225	260	295	335	365	
B	35	35	35	35	35	35	35	35	35	
C	30	30	30	30	30	30	30	30	30	
D	20	20	20	20	20	20	20	20	20	
Weight gr.	160	210	260	310	360	410	460	510	560	

Weight "see table"

Gang mounting manifold for valves and solenoid valves G 1/4"


Ordering code
6.10.14.45/N
* N. OF POSITIONS
2 = N. 2 positions
3 = N. 3 positions
4 = N. 4 positions
5 = N. 5 positions
N 6 = N. 6 positions
7 = N. 7 positions
8 = N. 8 positions
9 = N. 9 positions
10 = N. 10 positions

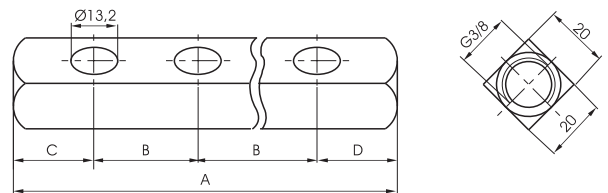

	* N. OF POSITIONS									
	2	3	4	5	6	7	8	9	10	
A	115	160	205	250	295	340	385	430	475	
B	45	45	45	45	45	45	45	45	45	
C	35	35	35	35	35	35	35	35	35	
D	35	35	35	35	35	35	35	35	35	
Weight gr.	200	275	350	425	500	575	650	725	800	

Weight "see table"


Spry valves

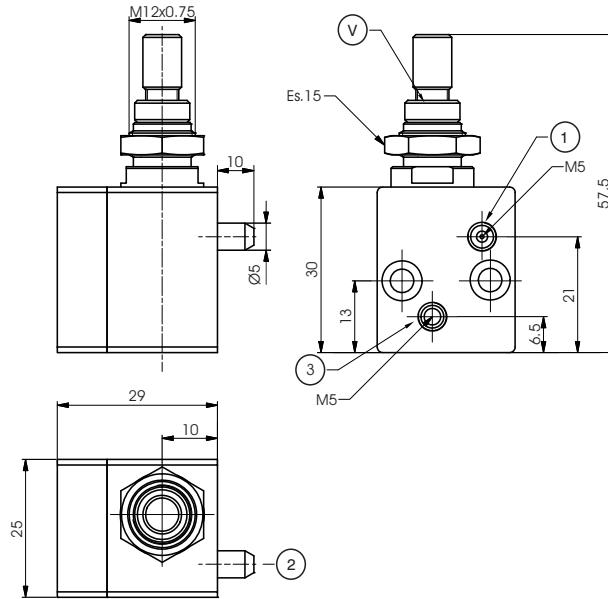


Ordering code

6.13.00


Supply air : Connection 1
Output (air and nebulized liquid) : Connection 2
Supply liquid : Connection 3

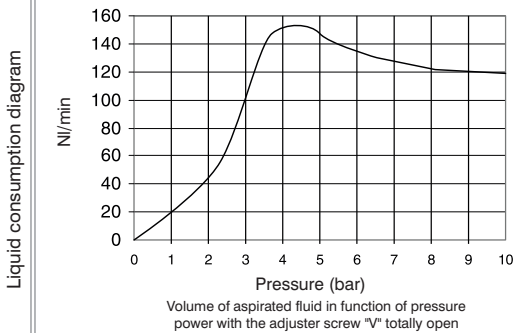

Pneumatics symbol



Vacuum diagram

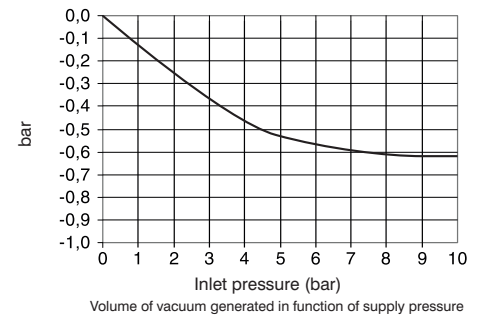

Operational characteristic

- This valve, is based on the Venturi principle, and it is used to spray and nebulize a liquid.
- Useful in all applications where is needed a continuous lubrication and / or refrigeration.
- Incoming air (connection 1) sucks the liquid through the venturi principle (connection 3) to obtain a continuous spray output (connection 2).

Technical characteristic

Fluid	Filtered and lubricated air
Liquid	Water and oil (Liquid viscosity 3°E-5°E)
Working pressure	3 - 10 bar
Operating temperature	-5°C - +70°C
Weight	85gr.